


felt handles for softwall · use guide

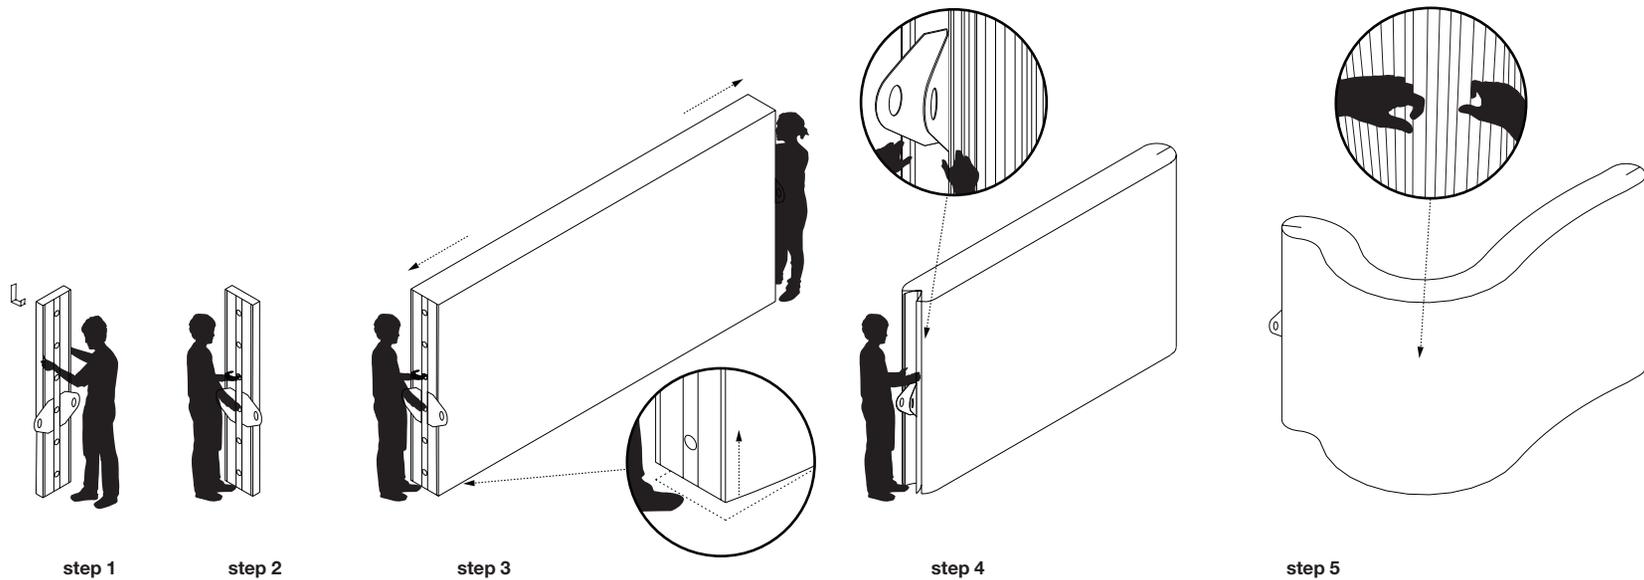

set up

step 1: softwall can be stored on stainless steel wall hook provided when cleaning floors so as not to damage/dirty the base.

step 2: With a person at each end of the softwall, get a firm hold on the circular hole handles.

step 3: Pull softwall open to its full length. When pulling softwall open, lift ends of wall 3cm (1") off floor, rather than dragging the end panels into the floor. Pull until you can feel the tension of the person on the other end. Hold it in that position for a few minutes. If the softwall is still not staying open to the length you would like (up to a max. length of 4.5m (15')), repeat the stretching process. The kraft paper version of softwall is a stiffer material and needs extra stretching.

step 4: Fold each magnetic end panel vertically onto itself as shown in diagram of step 4 above. This will stabilize softwall, so that it can be completely freestanding. You may also connect the magnetic end panel of one softwall to that of an adjacent softwall to create longer expanses, or connect it to steel columns and other steel surfaces. Please ask molo about steel strip accessory that can be applied to any solid wall or cabinet to provide an anchor point for your softwalls.

step 5: Simply arrange softwall into any position you wish by holding felt handle, lifting a little and pulling into place. Pulling softwall rather than pushing into a desired position is recommended, as pushing may crush and soften the fins on the bottom of the wall.

use + care

- Ensure that the floor surface is flat, clean and dry before setting up softwall.
- textile softwall + softblock are water, tear and UV resistant (will not discolour in sunlight).
- kraft paper softwall + softblock are not suitable for wet or humid environments.
- Baby wipes work well for cleaning textile softwall + softblock (or any nonabrasive cloth + water). If there is a stubborn stain on textile softwall try "Mr. Clean magic eraser", use with care as they can abrade the textile.
- textile softwall + softblock are made from an antistatic material which does not attract dust. Compressing and then expanding softwall + softblock will push air through the cells, blowing out dust that has collected inside.
- When cleaning the floors, we recommend compressing and storing your softwall on the stainless steel wall hook provided, to keep the bottom of softwalls clean and uncrumpled.
- It is possible to repair small tears in softwall, ask for details.
- softwall + softblock will benefit from periodically being closed and left in a compressed state for a few days in order to regain shape memory.