

China ASTM E84-2019b
Fire Rating


white textile for
molo soft collection

molo design, ltd

1470 Venables Street
Vancouver, B.C.
Canada V5L 2G7

t +1 604 685 0340
f +1 604 685 0342

info@molodesign.com
www.molodesign.com





中国认可
国际互认
检测
TESTING
CNAS L4743

Test Report

No. AJFS2005003574FF

Date: JUN.01, 2020

Page 1 of 6

DUPONT (CHINA) RESEARCH & DEVELOPMENT AND MANAGEMENT CO. LTD

NO.600 CAILUN ROAD PUDONG DISTRICT SHANGHAI 201203 P.R.C

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

Sample Name: 1070D

SGS Ref No.: 15080292

Style/Item No.: /

Test Requested:

To determine the flame spread index (FSI) and smoke-developed index (SDI) of the sample's surface burning characteristics when it is subjected to the conditions of specified in ASTM E84-2019b "Standard Test Method for Surface Burning Characteristics of Building Materials"

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date : MAY 13, 2020

Test Performing Date : MAY 13, 2020 TO MAY 27, 2020

Signed for and on behalf of
SGS-CSTC Co., Ltd. Anji Branch

Allen Zou
Lab Manager

scan to see the report



AJFS2005003574FF



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC 安基检测技术有限公司
Inspection & Testing Services
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Member of the SGS Group (SGS SA)

I. TEST CONDUCTED

This test was conducted in accordance with ASTM E84-2019b Standard Test Method for Surface Burning Characteristics of Building Materials.

II. INTRODUCTION

The method, designated as ASTM E84-2019b, "Standard Method of Test for Surface Burning Characteristics of Building Materials", is designed to determine the relative surface burning characteristics of materials under specific test conditions. Results are expressed in terms of flame spread index (FSI) and smoke developed index (SDI).

The purpose of this test method is to determine the relative burning behavior of the material by observing the flame spread along the specimen. Flame spread and smoke developed index are reported. However, there is not necessarily a relationship between these two measurements.

III. TEST PROCEDURE

The tunnel is preheated to 65.6°C (150°F), as measured by the floor-embedded thermocouple located 7.09m (23.25 ft) downstream of the burner ports, and allowed to cool to 40.6°C (105°F), as measured by the floor-embedded thermocouple located 3.96m (13 ft) from the burners. At this time the tunnel lid is raised and the test sample is placed along the ledges of the tunnel so as to form a continuous ceiling 7.32m (24 ft) long, 304.8mm (12 in) above the floor. The lid is then lowered into place.

Upon ignition of the gas burners, the flame spread distance is observed and recorded every 15 seconds. Flame spread distance versus time is plotted ignoring any flame front recessions. If the area under the curve (A) is less than or equal to 97.5 min·ft, FSI = 0.515·A; if greater, FSI = 4900/(195-A).

The test results for smoke shall be plotted and the area under the curve shall be divided by the area under the curve for heptane, multiplied by 100, and rounded to the nearest multiple of five to establish a numerical smoke-developed index (SDI).

IV. CONDITIONING

Prior to testing, the sample was conditioned,

To a constant weight at a temperature of 23±2.8°C (73.4±5°F) and at a relative humidity of 50±5%.

To be continued....





Test Report

No. AJFS2005003574FF

Date: JUN.01, 2020

Page 3 of 6

Sample details

Sample Description	Flexible sheet
Color	White
Area density	68 g/m ²

Exposed face:

One surface

Mounting methods:

The 20-gage, 2-in. (51-mm) hexagonal galvanized steel netting should span the width of the tunnel, then the specimen shall be placed on the netting.

The specimen consisted of 1 piece of 600mm wide×7320mm long.

Test results:

FSI	SDI
25	45

RATING:

The National Fire Protection Association Life Safety Code 101, Chapter 10, Section 10.2.3 "Interior Wall and Ceiling Finish Classification", has a means of classifying materials with respect to Flame Spread and Smoke Developed when tested in accordance with NFPA 255, ASTM E84, UL 723 "Method of Test of Surface Burning Characteristics of Building Materials".

International Building Code, Chapter 8, Interior Finishes, Section 803 "Wall and Ceiling Finishes", was classified in accordance with ASTM E 84 or UL 723. Such interior finish materials shall be grouped in the following classes in accordance with their flame spread and smoke-developed indexes.

The classifications are as follows:

	Class A	Class B	Class C
Flame Spread Index	0-25	26-75	76-200
Smoke-developed Index	0-450	0-450	0-450

Since the tested sample received a Flame Spread Index 25 and a Smoke-developed Index 45, it would meet the requirements of Class A interior Wall & Ceiling Finish Category.

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Technical Services Co., Ltd.
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com


Member of the SGS Group (SGS SA)

GRAPHICAL RESULTS:

Flame Spread Chart

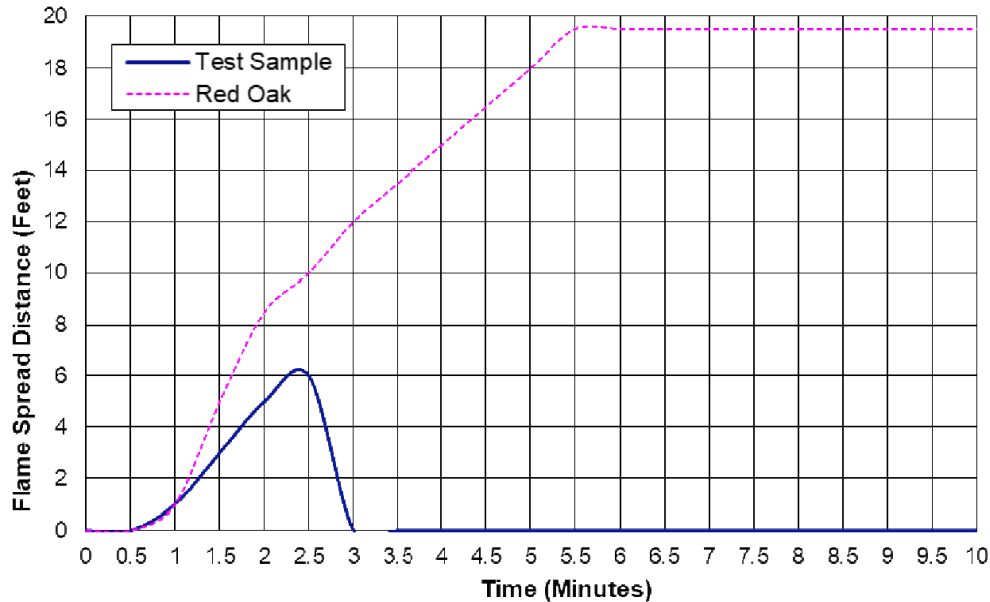

Smoke Developed Chart

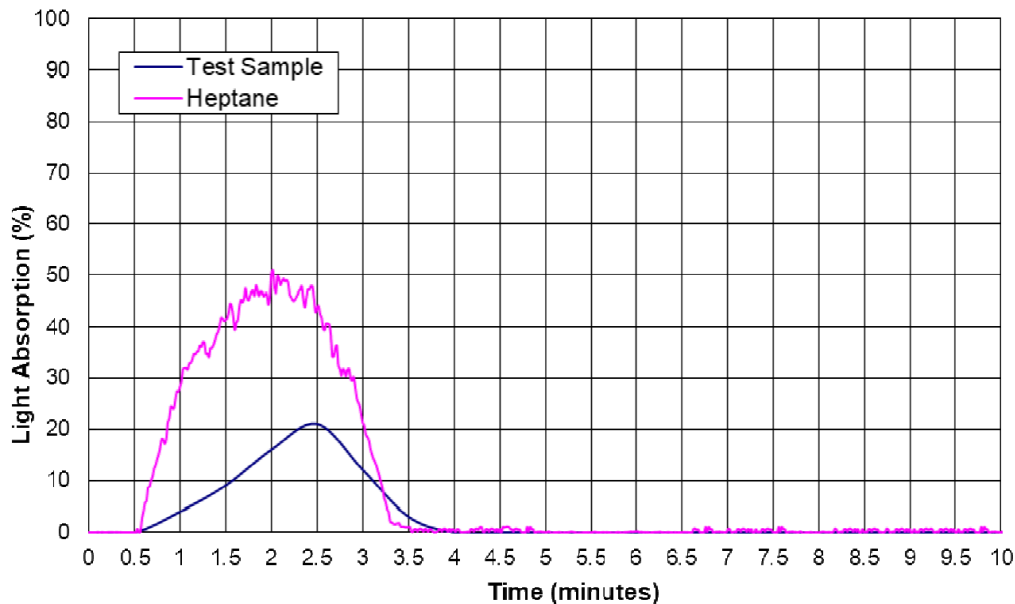

To be continued...

OBSERVATIONS

Time to ignition (sec)	16
Time to Max. FS (sec)	162
Maximum FS (feet)	6
Observations	Flaming Dripping

WARNING:

The use of supporting materials on the underside of the test specimen has the ability to lower the flame spread index from those which might be obtained if the specimen could be tested without such support. These test results do not necessarily relate to indices obtained by testing materials without such support.

Testing of materials that melt, drip, or delaminate to such a degree that the continuity of the flame front is destroyed, results in low flame spread indices that do not relate directly to indices obtained by testing materials that remain in place.

The test results relate only to the specimens of the product in the form in which were tested. Small differences in the composition or thickness of the product may significantly affect the performance during the test and may therefore invalidate the test results. Care should be taken to ensure that any product, which is supplied or used, is fully represented by the specimens, which were tested.

Statement: This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

To be continued....



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Test Report

No. AJFS2005003574FF

Date: JUN.01, 2020

Page 6 of 6

Photo Appendix:



SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC (Shanghai) Inspection & Testing Services Co., Ltd.
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Member of the SGS Group (SGS SA)